

CTL216TL

Eclipse Low Voltage Round Back Cylinder with Transformer

Specifications/Features

Fixture

Designed for MR16 12V LED lamps and is ideal for residential, commercial and retail lighting applications. Round back cylinder design, aluminum housing. Black phenolic baffle conceals lamp and provides glare control. Will accept (1) LF16 Lens. Double steel yoke holds the fixture in position with two knobs. 350° aiming.

For use with single circuit track only.

Lamp

50W MR16 Lamp or (1) MR16 LED Lamp, GU5.3 Base
This fixture can be used with a variety of MR16 LED Lamps. However, with the variances in these lamps, ConTech Lighting cannot be responsible, nor guarantee, that all MR16 LED lamps are universally compatible.
On fixtures designed for use with MR16 lamps, ConTech Lighting provides a clear, tempered safety glass. This safety glass should only be used with open MR16 lamps, and not used with MR16 lamps that contain an integral glass lens.

Electrical

Electronic Transformer
Input: 120V / 60Hz
Output: 12V
Rated Lamp Load: 2.5W min. to 60W max.

Dimming


Dimmable to 10% with an electronic low-voltage (ELV) dimmer. Dimming performance may vary due to field conditions, including but not limited to, power quality, installation and wiring, and variations in dimmer production. Please reference the dimmer manufacturer's instructions for dimmer installation and further information.

Warranty

This fixture is covered by ConTech's full one (1) year replacement guarantee after date of purchase.

Listing

cCSAus Certified. Suitable for dry locations.

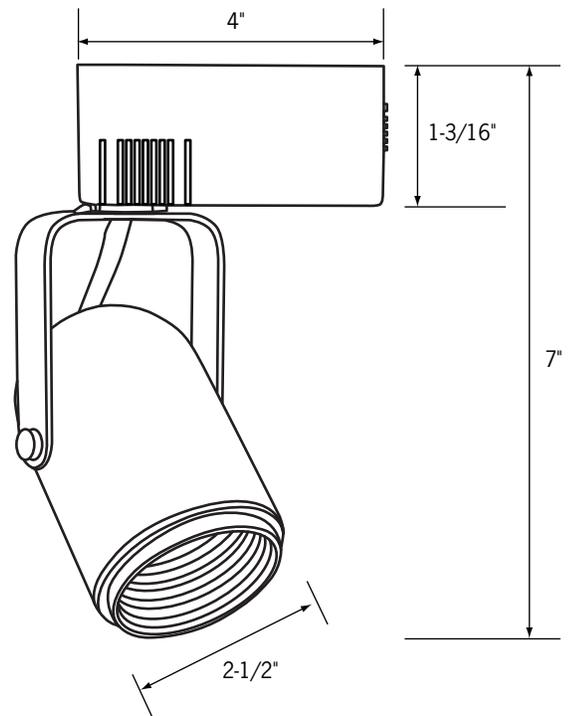

Ordering Information

Example Order: - -

Fixture	Finish	Baffle Color	Accessories
<input type="text" value="CTL216TL"/>	<input type="text" value="B - Black"/> <input type="text" value="P - White"/>	<input type="text" value=""/> - Black, -B Only Leave Blank <input type="text" value="WHT"/> - White, -P Only	<input type="text" value="LF16 - A, B, CL, G, LB, R, RO, Y, 73, LS, SL, UV"/> 2" Tempered glass lenses <input type="text" value="FA-16"/> - Honeycomb Louver

Color/Pattern Legend
-A (Amber), -B (Blue), -CL (Clear), -LB (Light Blue), -R (Red), -RO (Rose), -Y (Yellow), -73 (Spread Lens), -LS (Linear Spread Lens), -SL (Soft Light), -UV (Optivex UV Filter)