

LVR16-TEML

Low Voltage Downlight for New Construction with 8W LED MR16 Lamp

Specifications/Features

Housing/Mounting

New Construction housing for use in any type of ceiling application. Lamp housing is removable through ceiling aperture to access junction box. "Sure-grip" springs permit housing to be lowered and precisely adjust to ceiling thicknesses from 1/2" to 1-1/2". For insulated ceilings, maintain a 3" clearance around housing. Dual extension hanger bars span from 15" to 25-1/4" with reversible placement feature. Hanger bars may be extended to rest on T-bar grid.

Lamp/Electrical

Energy efficient, 8W MR16 LED lamp. Designed to last 25,000 hours. Color management system maintains color consistency over time and temperature. Correlated Color Temperature of 2700K, 3000K, and 3500K, Color Rendering Index of 82. Correlated Color Temperature of 4000K, Color Rendering Index of 85. High CRI of 95+ available in 3000K. 12° Lumen output = 450 (56 Lm/W) 24° Lumen output = 600 (75 Lm/W), 520 (65Lm/W) for high CRI lamp 36° Lumen output = 600 (75 Lm/W), 520 (65Lm/W) for high CRI lamp 12° Beam spread with CBCP of 5,500. 24° Beam spread with CBCP of 3,000; 2,550 for high CRI lamp. 36° Beam spread with CBCP of 1,800; 1,300 for high CRI lamp. Durable die-cast aluminum housing with lens to protect the LEDs and reflector. Porcelain halogen socket with spring clip, rated 200°C. Low voltage electronic transformer with Molex disconnect in J-box is fully dimmable with electronic low voltage dimmers. Transformer has internal thermal protection. J-box approved for through circuit wiring; (4) 1/2" knockouts, (2) 3/4" knockouts with spring latch access plates. 120V Transformer Ratings: Input: 120VAC, 60Hz, .54A, 65VA; Output: 12VAC, 60Hz, 4.2A, 50W

Dimming

Dimmable to 10% with an electronic low voltage (ELV) dimmer. Dimming performance may vary due to field conditions, including but not limited to, power quality, installation and wiring, and variations in dimmer production. Please reference the dimmer manufacturer's instructions for dimmer installation and further information.

Trims


Baffle, multiplier, wall wash, accent and adjustable trim options available to suit a broad range of applications. See "4" Trims for Low Voltage Housings" specification sheet for details.

Warranty

This fixture is covered by ConTech's full three (3) year replacement guarantee after date of purchase.

Labels/Usage

cULus listed. Suitable for damp locations. Flood and Wide Flood lamps are Energy Star Listed. City of Chicago approved.

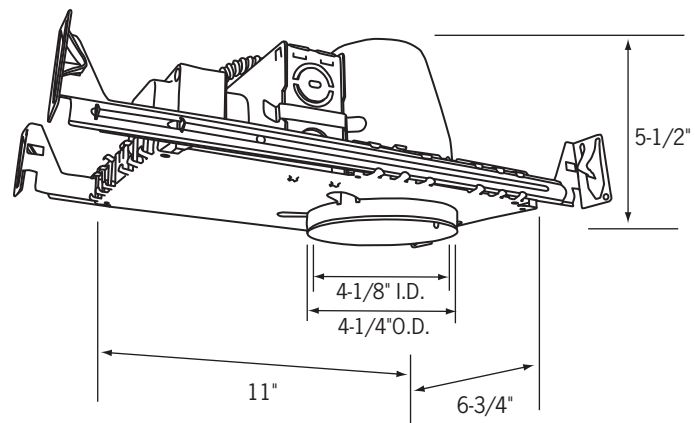

Ceiling Opening: 4-3/8"
Max. Ceiling Thickness: 1-1/2"

LVR16-TEML

Low Voltage Downlight for New Construction
with 8W LED MR16 Lamp

Ordering Information

Example Order:

Housing/Voltage

Lamp

Trims

Options

LVR16-TE - 120V/12V

- ML1227K** - 12°, 2700K, 82 CRI
- ML1230K** - 12°, 3000K, 82 CRI
- ML1235K** - 12°, 3500K, 82 CRI
- ML1240K** - 12°, 4000K, 85 CRI
- ML2427K** - 24°, 2700K, 82 CRI
- ML2430K** - 24°, 3000K, 82 CRI
- ML2435K** - 24°, 3500K, 82 CRI
- ML2440K** - 24°, 4000K, 85 CRI
- ML3627K** - 36°, 2700K, 82 CRI
- ML3630K** - 36°, 3000K, 82 CRI
- ML3635K** - 36°, 3500K, 82 CRI
- ML3640K** - 36°, 4000K, 85 CRI
- ML2430KC** - 24°, 3000K, 95 CRI
- ML3630KC** - 36°, 3000K, 95 CRI

For Trims, see attached "Trims for 4" Low Voltage Recessed Housings" spec sheet.


The following trims are not recommended for use with the LED lamp:

CTR1607 CTR1618
CTR1611 CTR1621

- CP** - Chicago Plenum
- CTR18-P** - LV Monopoint Adapter
- HB-24** - 27" Flat Hanger Set
- HBC-24** - 25" C-Channel Hanger Set
- RL-KIT** - Commercial Mounting Kit

Trims for 4" Low Voltage Recessed Housings

- Maximum lamp rating for most trim options: 50W 12V MR-16 lamp, GU5.3 base, unless noted.
- On recessed trims designed for use with MR16 lamps, ConTech Lighting provides a clear, tempered safety glass. This safety glass should only be used with open MR16 lamps, and not used with MR16 lamps that contain an integral glass lens. If use of MR16 with front glass is required, remove the factory provided clear tempered safety lens.
- All trims have white trim finish unless specified.
- All trims are cCSAus Certified and suitable for damp locations; only shower trims are listed for wet locations.



Baffled Downlight

Standard Trim, 5-1/2" O.D.

CTR1601-B

Adjustable Black Baffle, Black Trim Ring

CTR1601-P

Adjustable Black Baffle

CTR1601-P-WHT

Adjustable White Baffle

Narrow Trim, 4-15/16" O.D.

CTR1601N-P

Adjustable Black Baffle

CTR1601N-P-WHT

Adjustable White Baffle

Cast Aluminum Trim, 5-1/8" O.D.

CTR1601-PA-WHT


Adjustable White Baffle

CTR1601-BA

Black Baffle, Black Cast Aluminum Trim Ring

Deep baffle traps stray light and conceals lamp. May be used as downlight or adjustable accent light with 60° swing adjustment. Trim uses stepped lens holder design and can hold up to two (2) light controlling elements. 45mm lens on lower level of lamp seat, 50mm lens on higher level.

75W lamp may be used with LVR1675 housings.

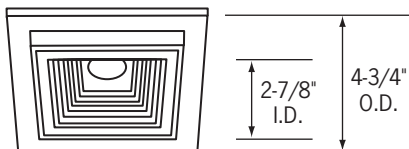


CTR1604-P

Black Baffled Square

Deep baffle traps stray light and conceals light source. Downlight or adjustable: up to 35° vertical adjustment. 45mm lens.

75W lamp may be used with LVR1675 housings.



Adjustable Multiplier

Standard Trim, 5-1/2" O.D.

CTR1602-P-(BLK, CLR, PL, WHT)

White Trim Ring, Select Reflector Finish

CTR1602-B-BLK

Black Trim Ring, Black Reflector

CTR1602-(ST, NK)-CLR

Select Metal Trim Finish, Clear Reflector

Narrow Trim, 4-15/16" O.D.

CTR1602N-P-(CLR, WHT)

White Trim Ring, Select Reflector Finish

CTR1602N-B-BLK


Black Trim Ring, Black Reflector

Cast Aluminum Trim, 5-1/8" O.D.

CTR1602-PA-(CLR, WHT)

Multipliers utilizes a highly polished, specular reflector to maximize light intensity while concealing the light source. Offers the flexibility to be used as a downlight or adjustable accent light with 35° swing adjustment. Trim uses stepped lens holder design and can hold up to two (2) light controlling elements. 45mm lens on lower level of lamp seat, 50mm lens on higher level.

75W lamp may be used with LVR1675 housings.

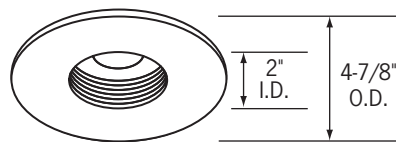


CTR1605-P*

Black Baffled Pin Spot

CTR1605-P-WHT*

White Baffled Pin Spot

Precise beam spread and unobtrusive appearance. Concealed lamp design for maximum eye comfort. Deep baffle. Baffle extends 1/16" past trim face. Trim uses stepped lens holder design and can hold up to two (2) light controlling elements. 45mm lens on lower level of lamp seat, 50mm lens on higher level.

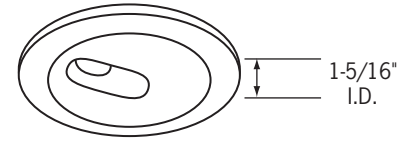

Slotted Wall Wash

Standard Trim, 5-1/2" O.D.


CTR1603-P

Narrow Trim, 4-15/16" O.D.

CTR1603N-P

Slot aperture permits maximum beam area adjustment for either wall wash or concealed accent lighting effects. 50° swing adjustment, 358° rotation. 50mm lens.


75W lamp may be used with LVR1675 housings.

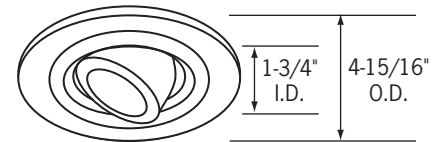

CTR1606-(B, P)*

Surface Adjustable

45° Max. vertical and 359° rotational aiming. Die-cast aluminum construction. Front access for re-lamping. 50mm lens. Not compatible with LVR-16 Housing.

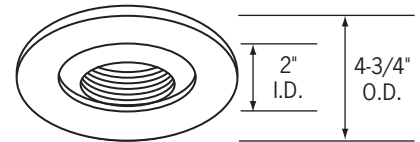

CTR1607-P

Adjustable Pin Spot, Black Baffle


CTR1607-P-WHT

Adjustable Pin Spot, White Baffle

Low profile gimbal design for aiming flexibility. 35° swing adjustment. Trim uses stepped lens holder design and can hold up to two (2) light controlling elements. 45mm lens on lower level of lamp seat, 50mm lens on higher level.

75W lamp may be used with LVR1675 housings.

Trims for 4" Low Voltage Recessed Housings

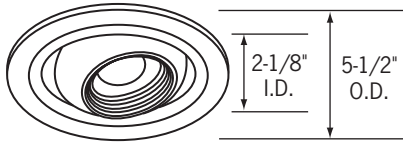


CTR1608-P

Black Baffled Eyeball

Up to 45° vertical aiming, 358° rotational adjustment. Black baffle provides excellent cutoff and lamp concealment. 45mm lens.

75W lamp may be used with LVR1675 housings.

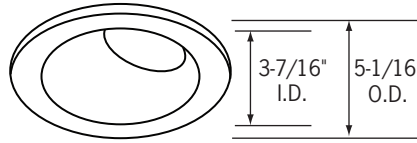

CTR1614-P-CLR*

Clear Reflector Angled Wall Wash


Adjustable lampholder; 55-75° aiming angle. 45mm lens.



CTR1624-(B, NK, P, ST)*1

Fully Adjustable Square in Round, Select Finish

87° vertical and 359° rotation adjustment. Die-cast aluminum construction. Front access, spring latch lamp retainer ring (black finish). 47mm lens. Depth from ceiling: 2-1/2"

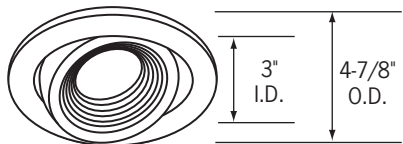


CTR1609-P*

Surface Adjustable, Cast Black Baffle

CTR1609-P-WHT*

Surface Adjustable, Cast White Baffle

Low glare baffle. Downlight or adjustable accent light with up to 35° vertical and 358° rotational adjustment. 50mm lens.

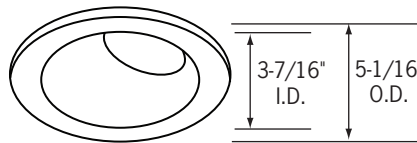

CTR1614CL-P-CLR*

Angled Wall Wash Shower Trim

Die cast aluminum. Clear specular angled reflector. Adjustable lampholder; 55-75° aiming angle. Double neoprene gasketed. Clear glass lens. 45mm lens.




CTR1625-(B, NK, P)*1

Fully Adjustable Round/Round, Select Finish

87° vertical and 359° rotation adjustment. Die-cast aluminum construction. Front access, spring latch lamp retainer ring (black finish). 47mm lens. Depth From Ceiling: 2-1/2"

75W lamp may be used with LVR1675 housings.

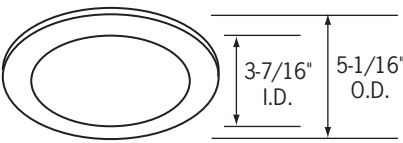


CTR1611FR-(NK, P, ST)*

Flat Frosted Glass Shower Light

CTR1611CL-(NK, P, ST)*

Flat Clear Glass Shower Light

Die cast aluminum. Double neoprene gasketed. Clear specular reflector. cULus listed for wet locations.

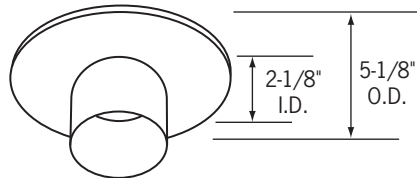

CTR1621FR-(NK, P)*

Frosted Glass Cylinder


Cylindrical glass diffuser with specular reflector focuses light downward and eliminates glare. Depth From Ceiling: 2"



CTR1629-(B, P)*1

Fully Adjustable Square/Square

87° vertical and 359° rotation adjustment. Die-cast aluminum construction. Front access, spring latch lamp retainer ring (black finish). 47mm lens. Depth From Ceiling: 2-5/8"

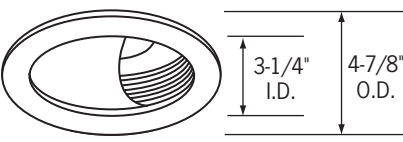

CTR1613-P*

Black Baffled Scoop Wall Wash

CTR1613-P-WHT*

White Baffled Scoop Wall Wash

For even wall wash light distribution. 45mm Lens.



CTR1635-P*1

Fully Adjustable Round/Round

87° vertical and 359° rotation adjustment. Die-cast aluminum construction. Front access, spring latch lamp retainer ring (black finish). 47mm lens. Depth From Ceiling: 2-3/4"

Reflector/Trim Finish Legend

All finishes are not available for all trims.

Reflector Finish Options:

- CLR** - Clear, Specular
- BLK** - Black, Specular
- WHT** - White Light, Specular
- PL** - Platinum, Matte

Trim Finish Options:

- P** - White
- B** - Black
- C** - Chrome
- NK** - Nickel
- S** - Silver UNLook
- CO** - Brushed Copper
- ST** - Brushed Stainless Steel

NOTE: Black finish retainer ring standard on adjustable trims. Order part number 1623/24 WHITE for white retainer ring. These fully adjustable trims will only accept one lens. If FA-16 45MM louver is required, remove the safety lens and use a front glass MR16 lamp. A series of 47mm tempered color or light controlling lenses may be used instead of the clear lens supplied.

*Order part number **SOCKET 1624/75** to convert trims for 75W housings.