

TLPPM

Pendant Mount Tapelight Extrusion Kit

Specifications/Features



- For use with ConTech TLT tapelight.
- Create a pendant mount luminaire by combining this extrusion kit and tapelight.
- Choose from our full offering of single color or white 12V and 24V tapelight.
- Round extrusion can be rotated to direct illumination in any direction.
- 5" Diameter canopies can be mounted to 4 inch junction boxes.
- Extrusion and lens can be cut in the field.
- Extrusion is available in 12" increments, up to 72".
- Includes 10' total length of field adjustable cords.
- Braided cord supplies low voltage to the tapelight and supports the extrusion.

Warranty

Five (5) year replacement guarantee when tapelight is installed using the aluminum mounting channel.

Listing

cCSAus Certified to UL standards
Suitable for damp locations.

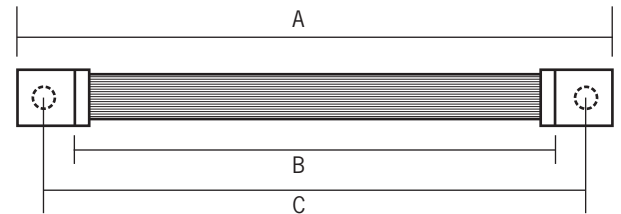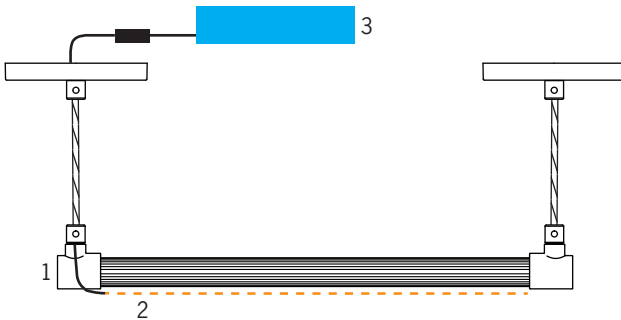

Extrusion Length (B)	Overall Length (A)	Centered Mounting Location (C)
12"	14"	13"
24"	26"	25"
36"	38"	37"
48"	50"	49"
60"	62"	61"
72"	74"	73"

Sample Component Order List

Item#	Component	Qty
1	TLPPMRF72-S Pendant Mount Extrusion Kit	1
2	TLT12V34K12 12V SHO Tapelight 4000K	6
3	TLP12VHW60-ENC HW Enclosed Driver	1

Ordering Information

Example Order: -

Model	Extrusion Shape	Lens	Extrusion Length	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

TLPPM **R** - Round **C** - Clear
F - Frosted *For Total Fixture Length, Add 2"* **B** - Black
12 - 12" **24** - 24" **S** - Silver
36 - 36"
48 - 48"
60 - 60"
72 - 72"

Note: Tapelight sections, driver and power connectors to be ordered separately

TLPPM

Pendant Mount Tapelight Extrusion Kit

Ordering Information: Components Needed for Full Assembly



12V/24W Plug-and-Play Power Supply
120VAC/12VDC. Includes AC wall plug and female power output plug for easy installation. Plug-in unit measures 3-1/4" L x 1-3/4" W x 1-1/4" D; system length: 6'. For use with 12V LED Tapelight only.
TLP12VP24



12V Desktop Plug-and-Play Power Supply
120VAC/12VDC. Includes AC wall plug and female power output plug for easy installation. Desktop unit: 4" L x 2" W x 1-1/4" D
TLP12VP36 - 36W
TLP12VP60 - 60W



12V Hardwire Power Supply
120VAC/12VDC. Includes stripped and tinned wire pig-tails on the input and output sides. Must be maintained within an enclosure that meets local building codes and NEC (supplied by others). 2' Wire leads. For use with 12V LED Tapelight only.

TLP12VHW20 - 120V/20W;
4-3/4" L x 1-3/16" W x 1" D
TLP12VHW60 - 120V/60W;
6-1/2" L x 1-3/4" W x 1-1/4" D
TLP12VHW60277 - 277V/60W;
6-1/2" L x 1-3/4" W x 1-1/4" D



12V Hardwire Class II Enclosed Driver
120VAC/12VDC. Dimmable Class 2 driver. Compact self-enclosed driver with two (2) knockouts. Auto Reset and short circuit protection. 120V Dimming only, no low voltage dimming. For use with 12V LED Tapelight only.

TLP12VHW20-ENC - 120V/20W;
6-3/4" L x 2-5/8" W x 1-1/4" D
TLP12VHW60-ENC - 120V/60W;
6-3/4" L x 2-5/8" W x 1-1/4" D



Female Connector
6" Connector includes a wire pigtail end and a female plug connector on the other end. Used to add plug and play female connector to hardwire power supplies. For use with 12V or 24V LED Tapelight.

TLCCF



Plug-and-Play Power Supply Extension
Includes male and female plug connectors. For use with 12V or 24V LED Tapelight.

TLCEXT48 - 48"
TLCEXT96 - 96"



24V Plug-and-Play Power Supply
120VAC/24VDC. Includes AC wall plug and female power output plug for easy installation. Plug-in unit measures 3-1/4" L x 1-3/4" W x 1-1/4" D; system length: 6'. For use with 24V LED Tapelight only.

TLP24VP36 - 36W
TLP24VP60 - 60W
TLP24VP90 - 90W



24V Hardwire Power Supply
120VAC/24VDC. Includes stripped and tinned wire pig-tails on the input and output sides. Must be maintained within an enclosure that meets local building codes and NEC (supplied by others). 1' Wire leads. Class II. For use with 24V LED Tapelight only.

TLP24VHW20 - 120V/20W;
5-3/4" L x 1-1/2" W x 1-1/4" D
TLP24VHW60 - 120V/60W;
6-1/3" L x 1-3/4" W x 1-1/4" D
TLP24VHW96 - 120V/96W;
8-3/4" L x 2-2/3" W x 1-1/2" D



24V Hardwire Class II Enclosed Driver
120VAC/24VDC. Dimmable Class 2 driver. Compact self-enclosed driver with two (2) knockouts. Auto Reset and short circuit protection. Triac Voltage Dimming only, not compatible with low voltage. For use with 24V LED Tapelight only.

TLP24VHW20-ENC - 120V/20W;
6-3/4" L x 2-2/3" W x 1-1/4" D
TLP24VHW60-ENC - 120V/60W;
6-3/4" L x 2-2/3" W x 1-1/4" D
TLP24VHW96-ENC - 120V/96W;
6-3/4" L x 2-2/3" W x 1-1/4" D
TLP24VHW96-ENC277V - 277V/96W;
9-7/8" L x 3" W x 3" D